

**Angled Rod-Mount Arm  
P/N 3001701**

**with color inserts and  
verbiage label installed**

**Drop-in Design**

Handle assemblies can be mounted and/or removed from rear of extrusion without having to remove adjacent sections of extrusion from mounting frame.

Extrusion sections and handle assemblies can be assembled in any sequence because of this feature.

**Straight Rod-Mount Arm  
P/N 3000988**

**with color inserts and  
verbiage label installed**

**Adjustable**

Stainless steel cap screws bolt into floating brass bushings when mounting each control assembly. The floating bushings allow the handles starting point to be adjusted up to 30 degrees and ensure alignment with other valve control handles in the row.


VERBIAGE SIZE B

VERBIAGE SIZE B

**Innovative Controls  
Top Mount Valve Controls**

Extrusions can remain in place if handles need to be removed and reassembled.



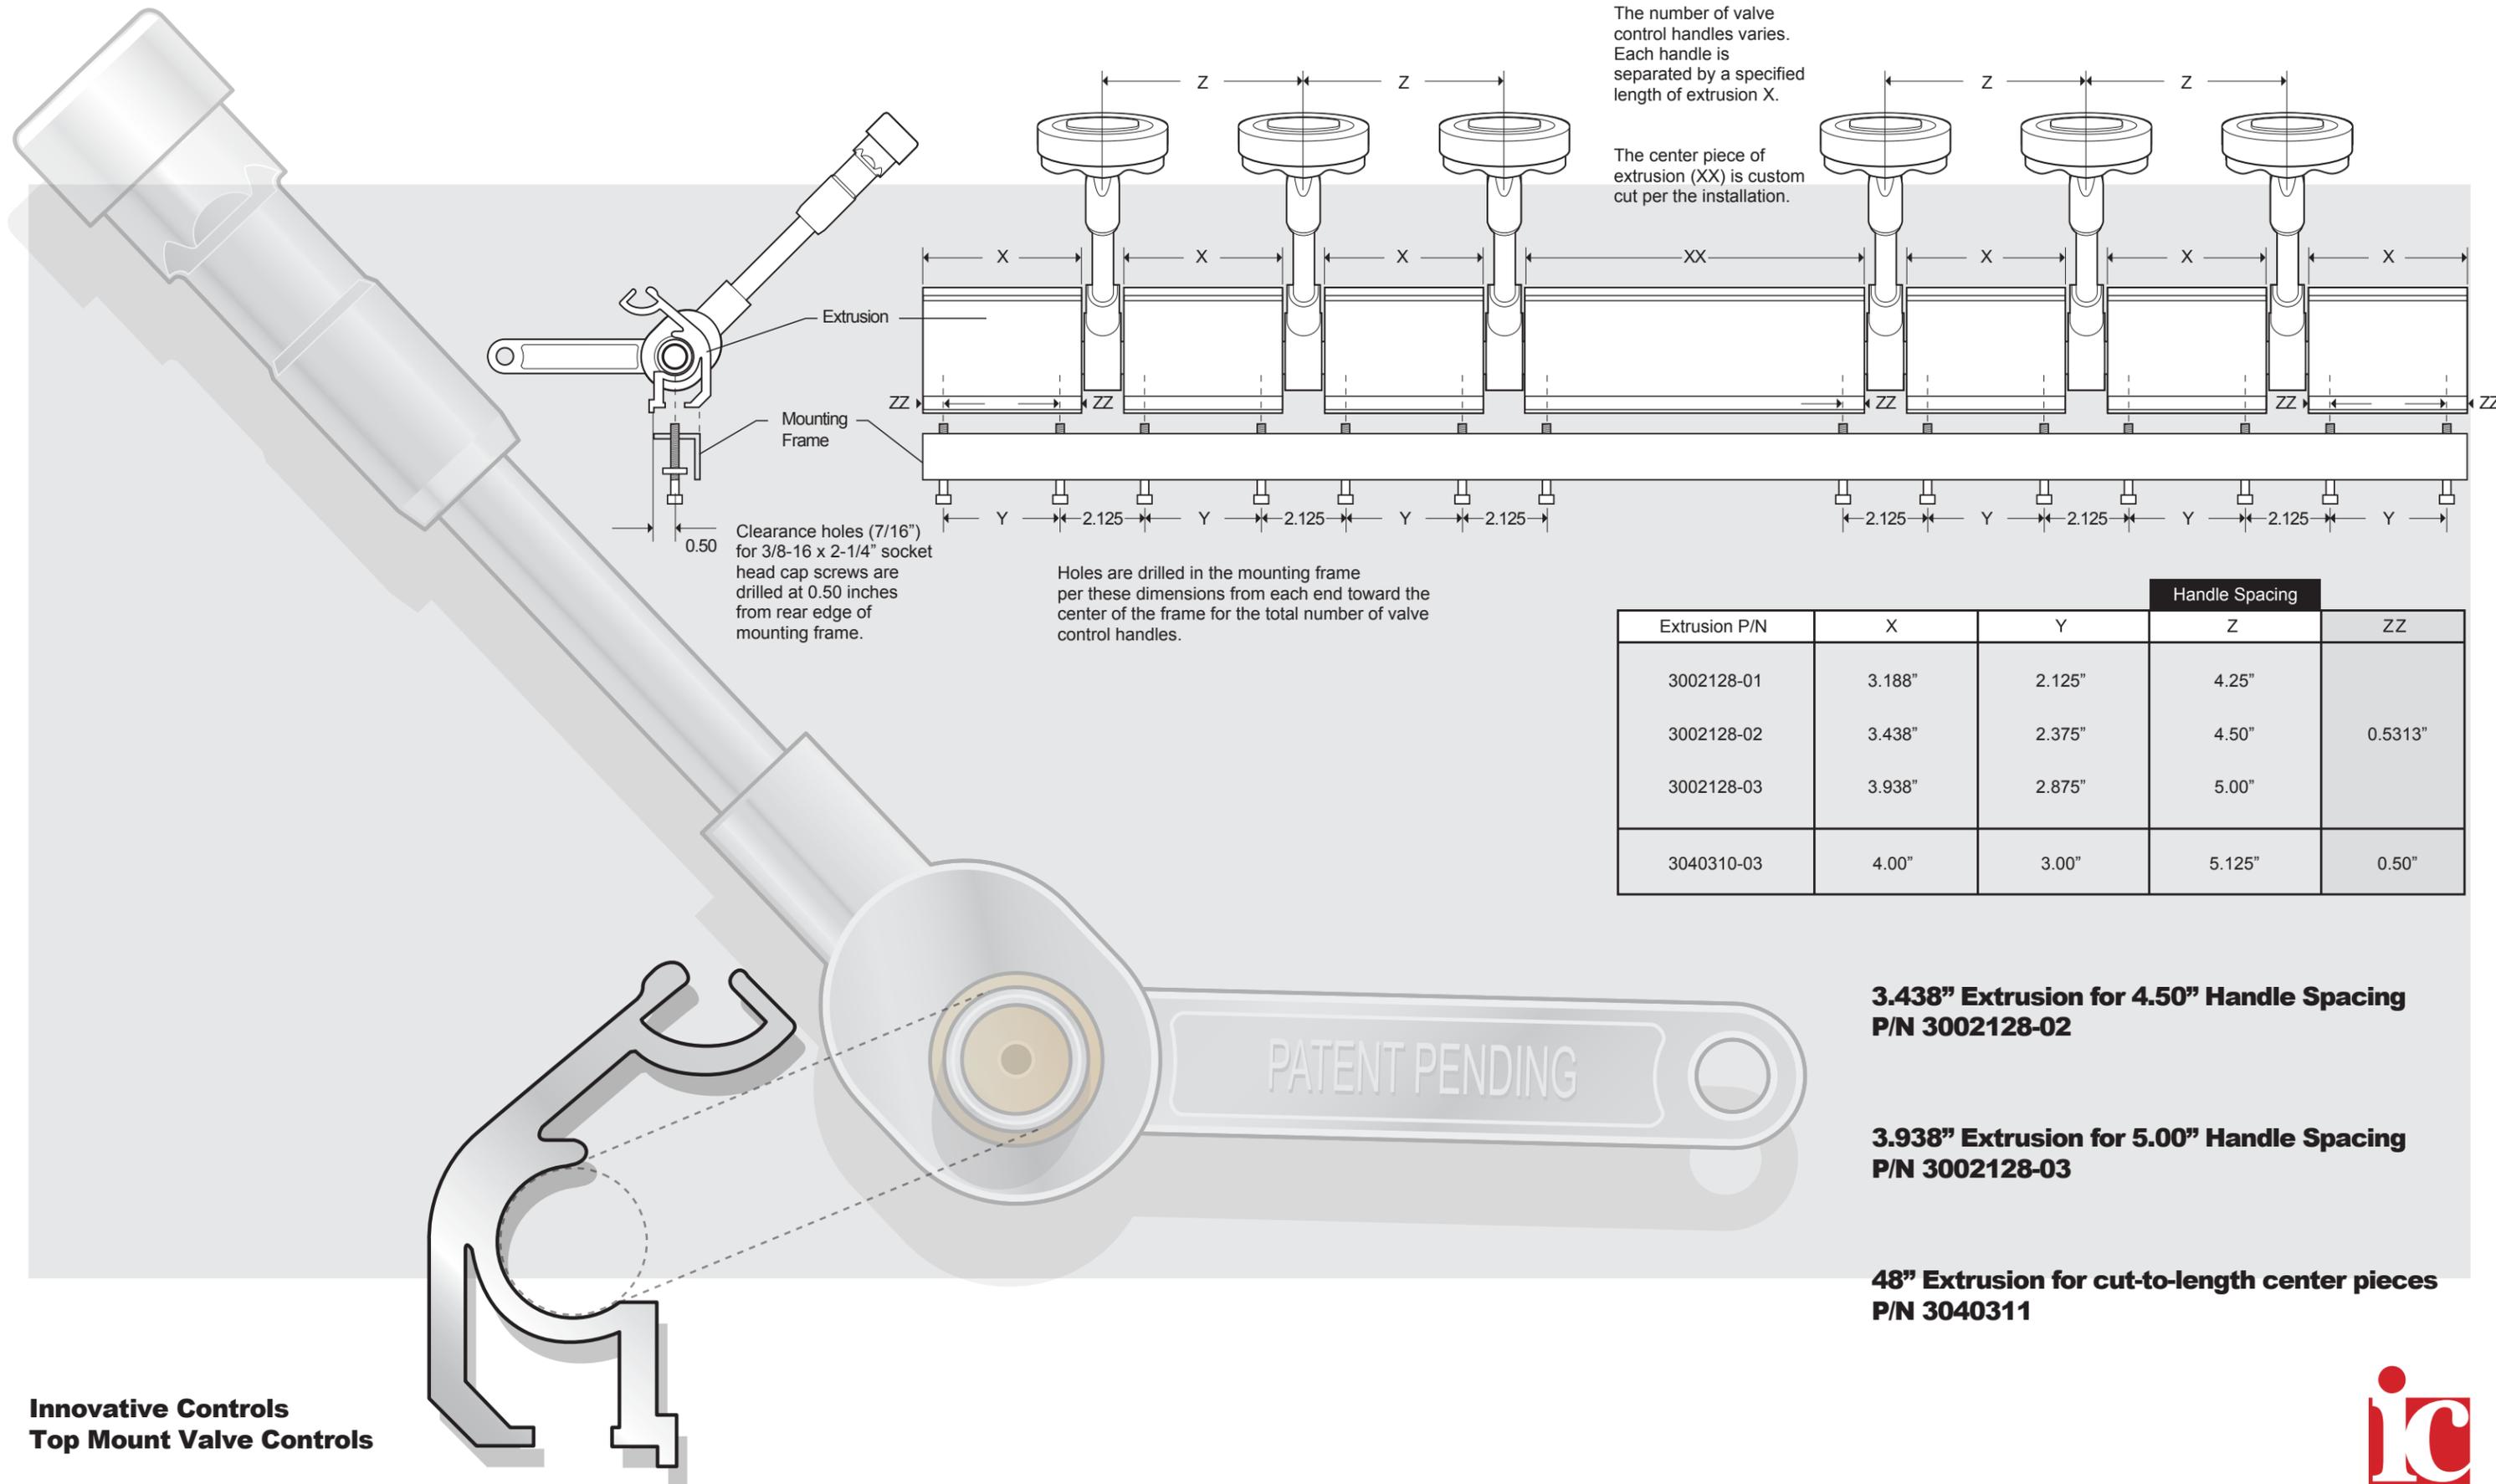


**Innovative Controls  
Top Mount Valve Controls**

**3.438" Extrusion for 4.50" Handle Spacing  
P/N 3002128-02**

**3.938" Extrusion for 5.00" Handle Spacing  
P/N 3002128-03**

**48" Extrusion for cut-to-length center pieces  
P/N 3040311**



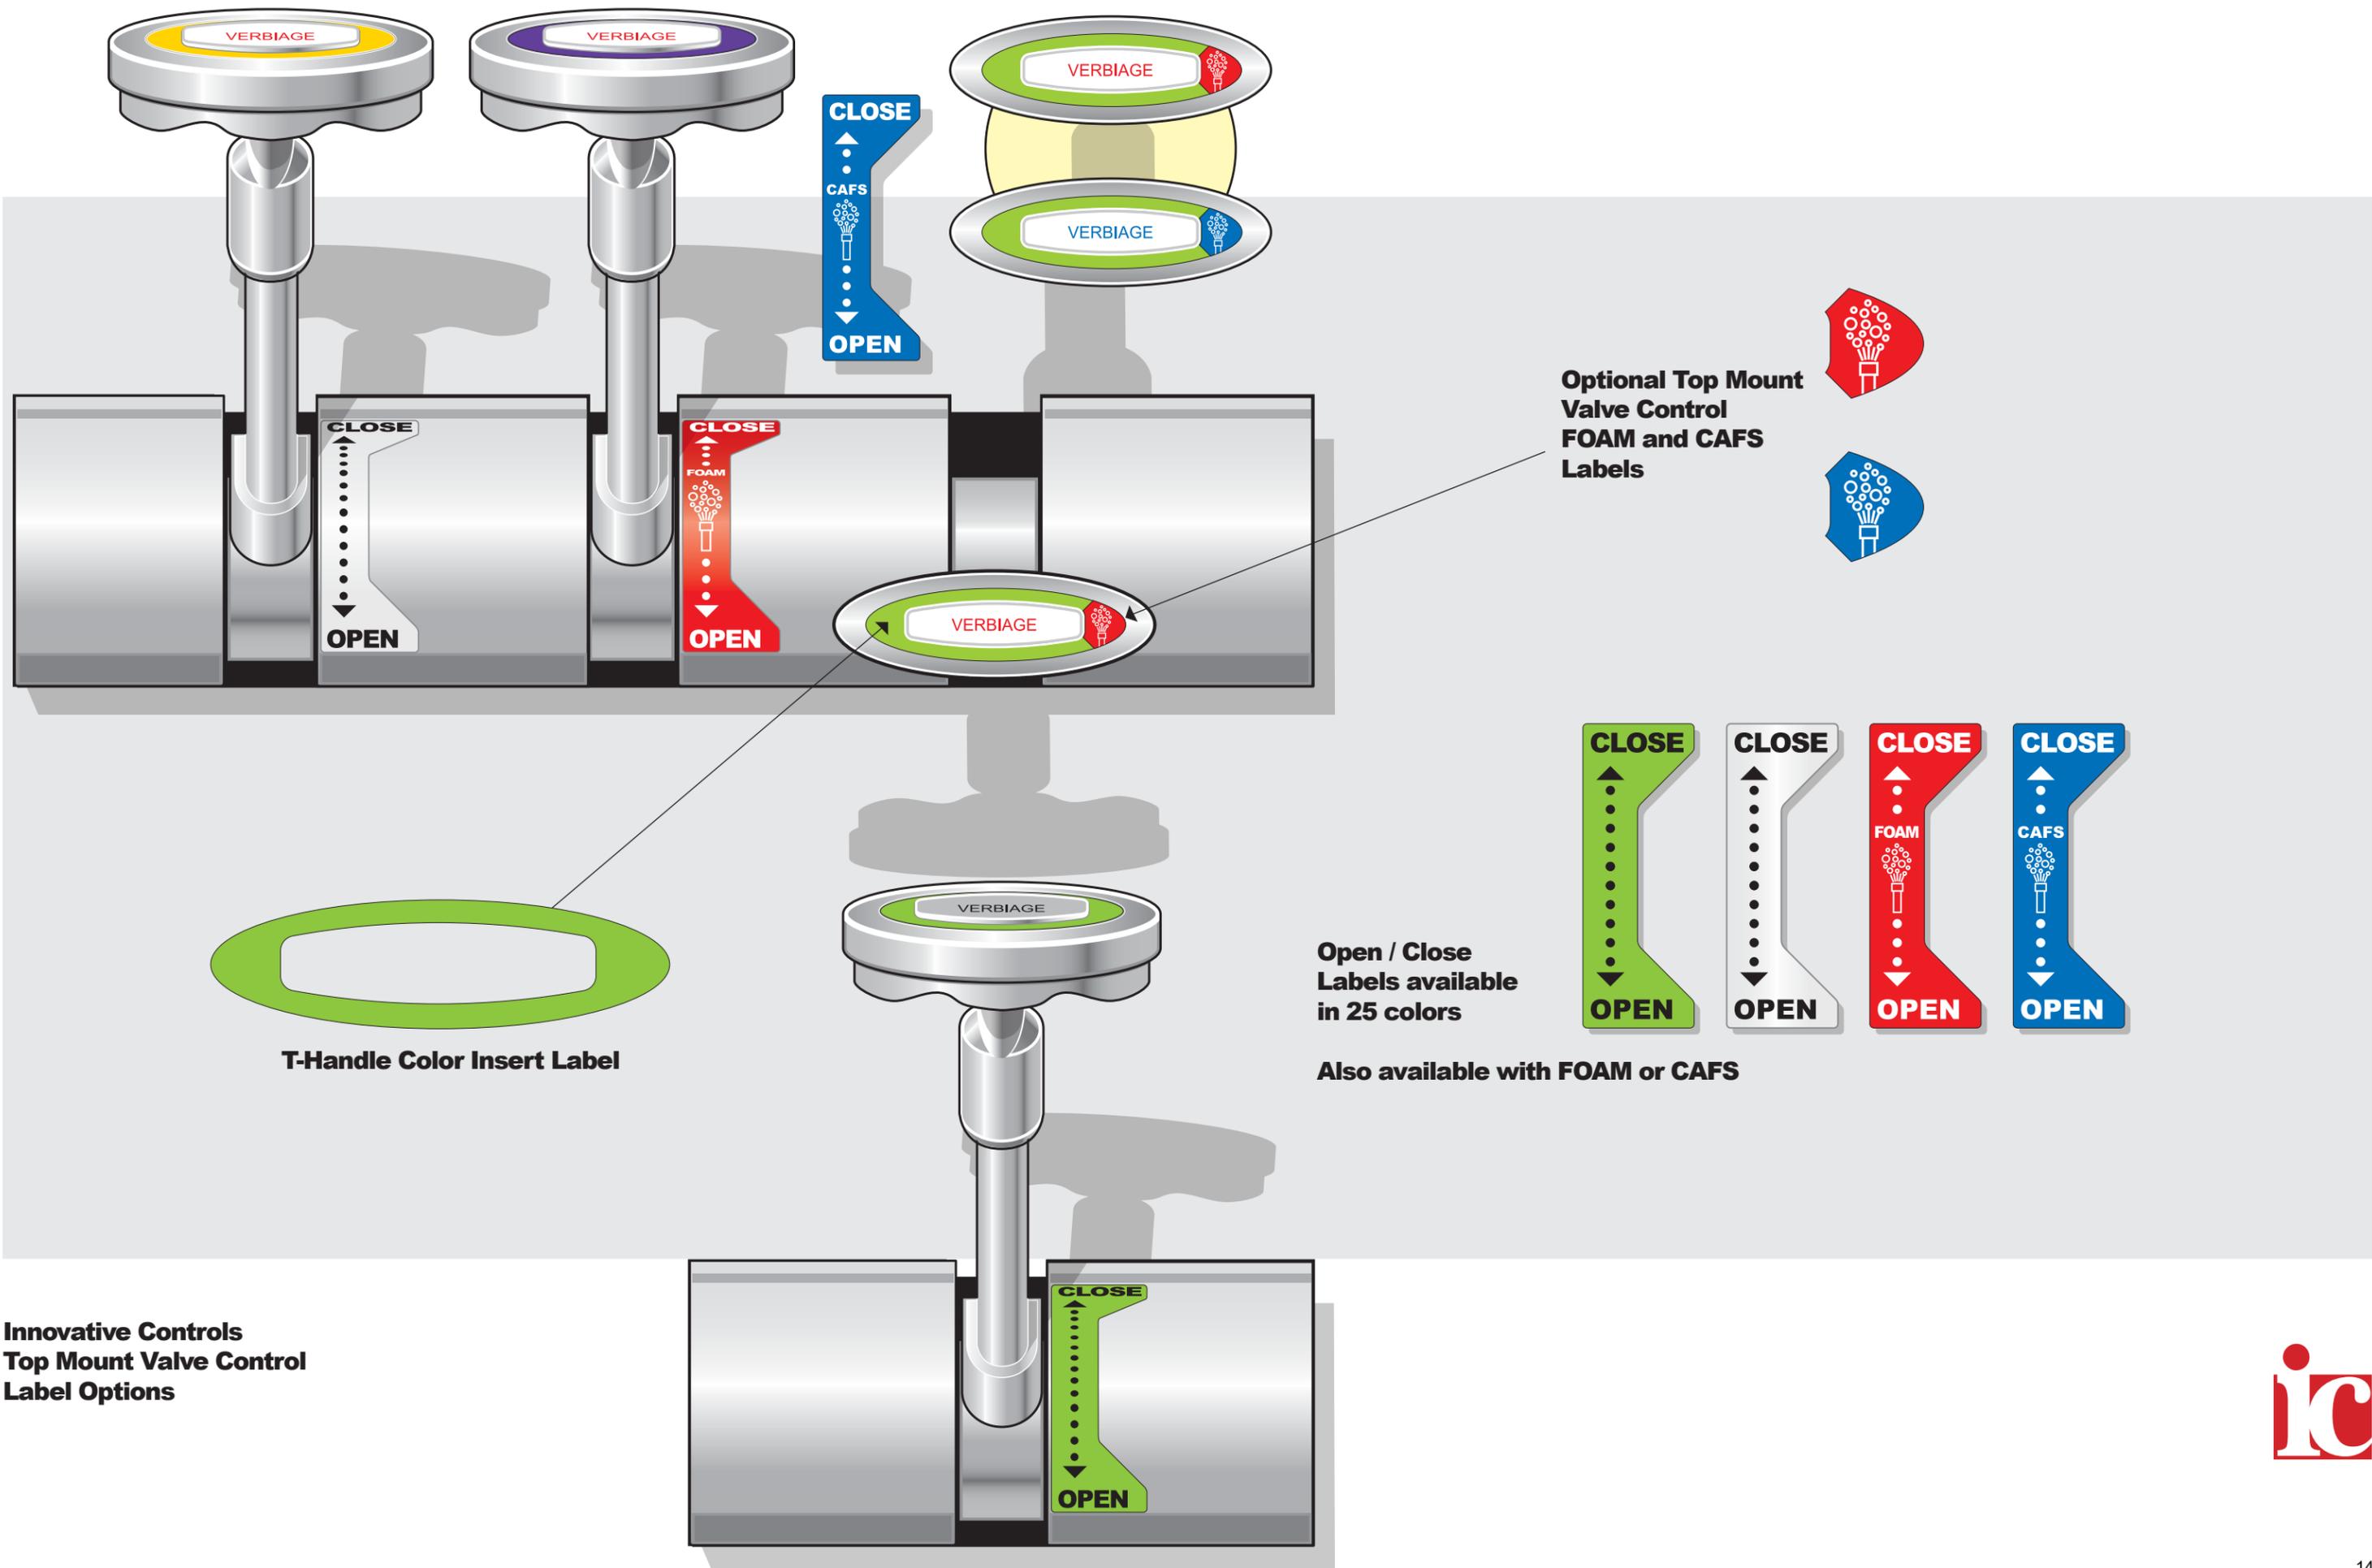

**Innovative Controls  
Top Mount Valve Control  
Label Options**

